KX

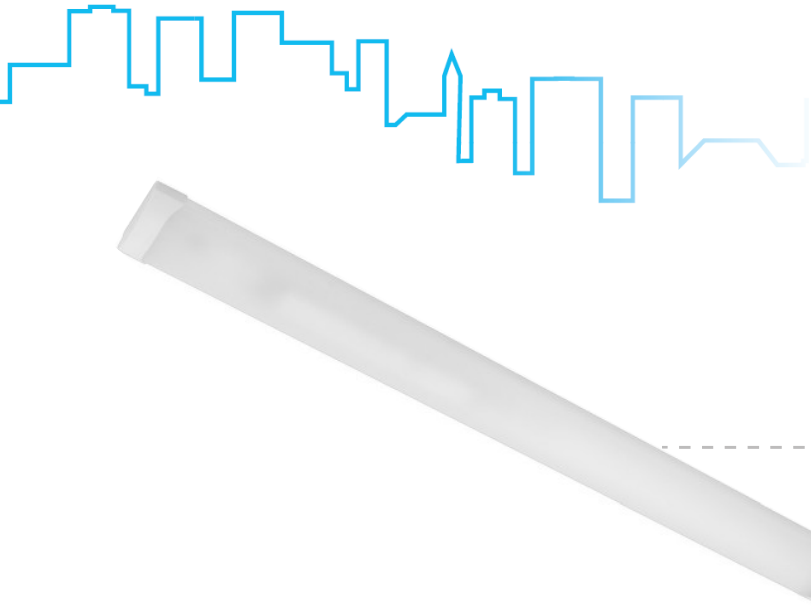

KX3000



KX

Oprawa LED kloszowa

Korpus:
Malowana na biało blacha stalowa
Zakończenia z białego tworzywa sztucznego
System optyczny:
KO – klosz opal z PMMA
KMO – matowy klosz opal z PMMA
LED:
Mid Power LED
CRI 80 (opcjonalnie CRI 90)
3... 3000K
4... 4000K
6... 6500K
Wyposażenie elektryczne:
ND – driver nieściemniany (standard)
DALI – driver ściemnialny cyfrowo
Przeznaczenie:
oprawa może być montowana natynkowo lub zwieszana:
sklepy, szkoły, pomieszczenia socjalne, sportowe itp.
Akcesoria:
kosz ochronny OM
zwieszaki linkowe ZH/UNI4

LED fitting with cover

Body:
white painted metal sheet
white plastic endcaps
Optic:
KO – opal PMMA cover
KMO – MAT opal PMMA
LED:
Mid Power LED
CRI 80 (CRI 90 on request)
3... 3000K
4... 4000K
6... 6500K
Wiring:
ND – not dimmable (standard)
DALI – dimmable driver (DALI)
Application:
these fittings can be used as surface mounted or suspended:
for shops, schools, social, sports and living spaces
Accessories:
protection grid – OM
ZH/UNI4 – universal 4-wires suspension

ZAKOŃCZENIE / ENDCAP	DEMONTAŻ KLOSZA / COVER REMOVAL	PODŁĄCZENIE / TERMINAL
		

Oznaczenie kodowe oprawy / codes: KX5000M3KO/ND

KX	5000	M	3	KO	/ND
Typ oprawy / Luminaire type	Strumień świetlny / Light output	Długość korpusu / body lenght: S = 600 mm M = 1200 mm L = 1500 mm	Temperatura barwowa / Color temperature: 3 = 3000K 4 = 4000K 6 = 6500K	Typ klosza / Cover type: KO = opal / opal KM = matopal / matopal	Wyposażenie elektryczne / Driver type: ND – bez regulacji strumienia / no dimmable DALI – regulacja cyfrowa strumienia / dimmable DALI

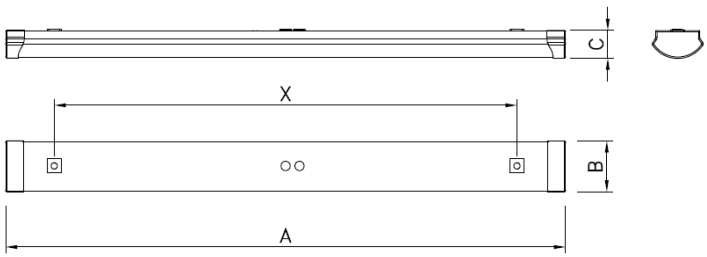

	W	lm	lm/W	A	B	X	C	kg	LED=
KX2000S&KO	20	2500	125	630	110	498	60	1,8	2×18W
KX4000S&KO	34	4200	124	630	110	498	60	1,8	
KX3000M&KO	18	2600	144	1210	110	1000	60	2,5	
KX4000M&KO	25	3800	152	1210	110	1000	60	2,5	
KX5000M&KO	36	5400	150	1210	110	1000	60	2,5	2×36W
KX3000L&KO	22	3300	150	1500	110	1200	60	3	
KX6000L&KO	47	6900	147	1500	110	1200	60	3,0	
KX8000L&KO	58	8200	141	1500	110	1200	60	3,0	2×58W

& - 3 = 3000K, 4 = 4000K lm – strumień świetlny z oprawy / luminaire light output # - wyposażenie elektryczne / wiring

W związku ze stałym rozwojem technologii LED, parametry mogą ulec zmianie. Strumień świetlny i obciążenie elektryczne mogą się wahać +/- 10% od wartości nominalnych. Temperatura barwowa może się wahać +/- 150K od wartości nominalnej. Uszkodzenie 1 punktu LED nie ma wpływu na skuteczność świetlną oprawy i nie jest podstawą do reklamacji takiej oprawy. | Due to program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.